

BRUNO B30



Hanging lamp with directional light and prismatic polycarbonate diffuser. The cover frame is made of TPU and metal, finished externally with different materials depending on the selected variation.

Light output is selectable in two temperature (2,700 K, 4,000 K) or tunable white (2,700 K - 6,500 K).

Several different control modes may be selected


OF - on/off

DW - dimmable (manual, 0-10V)

TW - tunable white (Dali, Casambi)*

* disponibile a breve

Size	320 x 210 x 105 mm	
Power (OF)	13 W	
Power (DM, TW)	20 W	
Light source	2 led modules	
Light temperature	2.700 K, 4.000 K tunable white (2.700 K - 6.500 K)	
System flux (OF)	1.200 lm @ 2.700 K 1.300 lm @ 4.000 K	
System flux (DM, TW)	1.800 lm @ 2.700 K 2.000 lm @ 4.000 K	
Chromatic rendering index	CRI > 95, CRI R9 > 50	
System efficiency	100 lm/w	@ 4.000 K
	90 lm/w	@ 2.700 K
Light control		
(OF)	on/off	
(DW)	dimmable (manual, 0-10V)	
(TW)	tunable white (Dali, Casambi)	
Photobiological risk class	RG1 (IEC 62471)	
Energy efficiency class	F (UE 2019/2015)	
Led and power supply replacement	by qualified operator only	

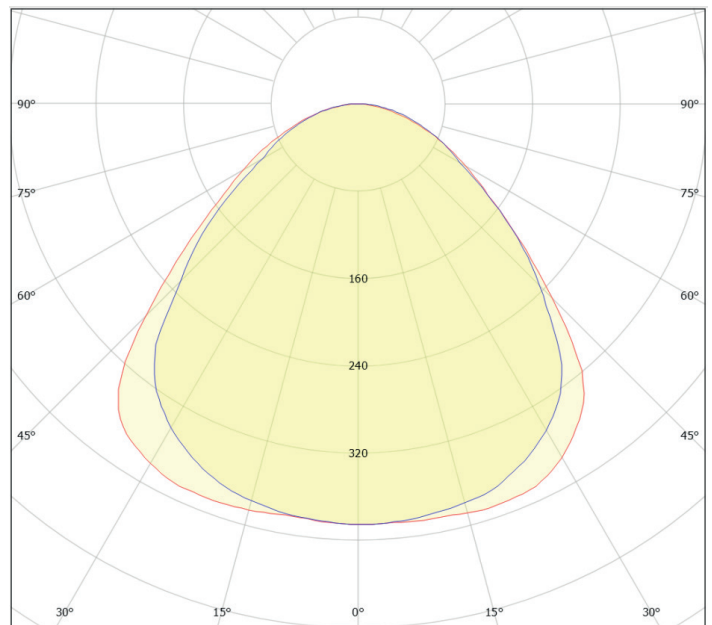

Mounting	suspension
Ambient	indoor
Protection	IP 20
Line AC voltage	220 - 240 V 50-60 Hz
Protection Class	I
Cord	lined with fabric 2 mt (OF) 2, 3 or 5 mt (DW, TW)
Materials	metal, polycarbonate, TPU. Additional materials base on the variant chosen.