

### WANDA W35



Indoor directional suspension lamp with dark light (anti-glare) reflector and built-in control gear in ceiling rose. Aesthetic covers can be selected from numerous variants in different materials and colors.

Light output is selectable in two temperature (2,700 K, 4,000 K) or tunable white (2,700 K - 6,500 K).

Several different control modes may be selected


OF - on/off

DW - dimmable (manual, 0-10V)

TW - tunable white (Dali, Casambi)\*

\*available soon

<b>Size</b>	365 x 65 x 35 mm	
<b>Power (OF)</b>	12 W	
<b>Power (DM, TW)</b>	15 W	
<b>Light source</b>	1 led module	
<b>Light temperature</b>	2.700 K, 4.000 K tunable white (2.700 K - 6.500 K)	
<b>System flux (OF)</b>	1.000 lm @ 2.700 K 1.100 lm @ 4.000 K	
<b>System flux (DM, TW)</b>	1.150 lm @ 2.700 K 1.300 lm @ 4.000 K	
<b>Chromatic rendering index</b>	CRI > 90, CRI R9 > 50	
<b>System efficiency</b>	100 lm/w	@ 4.000 K
	90 lm/w	@ 2.700 K
<b>Light control</b>		
<b>(OF)</b>	on/off	
<b>(DW)</b>	dimmable (manual, 0-10V)	
<b>(TW)</b>	tunable white (Dali, Casambi)	
<b>Photobiological risk class</b>	RG1 (IEC 62471)	
<b>Energy efficiency class</b>	F (UE 2019/2015)	
<b>Led and power supply replacement</b>	by qualified operator only	

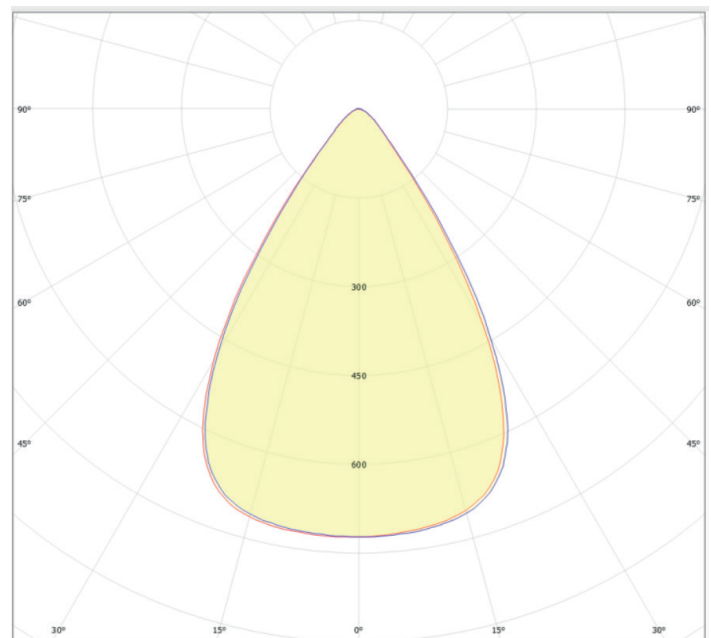

<b>Mounting</b>	suspension
<b>Ambient</b>	indoor
<b>Protection</b>	IP 20
<b>Line AC voltage</b>	220 - 240 V 50-60 Hz
<b>Protection class</b>	I
<b>Cord</b>	lined with fabric 2 mt (OF) 2, 3 or 5 mt (DW, TW)
<b>Materials</b>	metal, wood, synthetic foam. Additional materials based on the variant chosen.